

Grounded in Quality

A proud member of the Hunter Construction Group

Karuah Hard Rock Quarry

Environmental Monitoring Report:

April 2023



ISO 14001 Environmental Management

CERTIFIED

ISO 45001 Occupational Health and Safety Management CERTIFIED

80 EMS

OHS 739660

Table of Contents

| 1 | Intro | duction | 3 |
|--------|--------------|---|----|
| 2 | Air (| Quality Monitoring | 4 |
| 2.1 | | Deposited Dust Monitoring | 5 |
| 2 | .2 | High Volume Air Sampling | 5 |
| 3 | Blas | Monitoring | 7 |
| 4 | Nois | e Monitoring | 8 |
| 4 | .1 | Attended Monitoring | 8 |
| 4 | .2 | Unattended Noise Monitoring | 9 |
| 5 | Surf | ace Water Monitoring | 10 |
| 6 | Wea | ther Monitoring | 11 |
| 7 | Rep | orting | 14 |
| 7 | .1 | Incident | 14 |
| 7 | .2 | Non-Compliance | 14 |
| 7 | .3 | Complaints | 14 |
| T - I- | . 4 5 | noine annual Durk ation Linear at 44500 information | 2 |
| | | nvironmental Protection Licence 11569 informationevelopment Consent 265-10-2004 information | |
| | | A 265-10-2004 Long Term Assessment Criteria for Deposited Dust | |
| | | A 265-10-2004 Long Term Impact Assessment Criteria for Particulate Matter | |
| Tab | le 5 D | A 265-10-2004 Short Term impact Assessment Criterion for Particulate Matter | 4 |
| Tab | le 6 A | r Quality Monitoring Locations | 4 |
| | | eposited dust monitoring results | |
| | | gh Volume Air Sampling (μg/m³) results | |
| | | PL 11569 Condition M7.1 Blasting | |
| | | Noise impact assessment criteria | |
| | | Noise monitoring locations Attended noise monitoring results. | |
| าลท | ப / | ALLENGEG NOISE MONITORING RESUITS | × |
| | | • | |
| Tab | le 13 | Jnattended noise monitoring results EPL 11569 - Pollutant concentration limits | 9 |

Appendix 1

Monitoring Locations

1 Introduction

This report has been completed to meet the requirements of Section 66(6) of the *Protection of the Environment Operations Act 1997* and the NSW Environmental Protection Authority's (EPA) *Requirements for Publishing Pollution Monitoring Data* (EPA, 2013). This report summarises the required monitoring data under *Environmental Protection Licence 11569* (the EPL) (see Table 1) and *Development Consent 265-10-2004* (the Consent) (see Table 2) for the Karuah Hard Rock Quarry (the Quarry).

Table 1 Environmental Protection Licence 11569 information

| Environmental Protection Licence Number | 11569 |
|--|---|
| Licensee's Name | Hunter Quarries Pty Limited |
| Licensee's Address | Licensee Postal Address: PO Box 3284 Thornton NSW 2322. Premises Address: Karuah Quarry, Corner of Andesite Road and The Branch Lane, Karuah NSW 2324. |
| Link to Full Licence on the EPA Website | Lot 21 DP 1024341, Lot 11 DP 1024564 & Lot 12 DP 1024564. |

Table 2 Development Consent 265-10-2004 information

| Development Application | DA 265-10-2004 |
|-------------------------|---|
| Applicant | Hunter Quarries Pty Limited |
| Consent Authority | Minister for Infrastructure, Planning and Natural Resources |
| Land | Lot 21 DP 1024341, Lot 11 DP 1024564 & Lot 12 DP 1024564. |

A summary of the environmental monitoring data for April 2023 is covered in this report.

Tables throughout this report provide key monitoring information from the EPL and the Consent, such as:

- location of monitoring;
- pollutant;
- unit of measurement; and
- monitoring frequency required.

Monitoring locations are identified in in Appendix 1.

2 AIR QUALITY MONITORING

Dust emissions generated by the Quarry operation must not cause additional exceedances of ambient air quality criterion outlined in *Schedule 3, Condition 14* of the Consent (see Table 3, Table 4 and Table 5). Deposited dust and TSP/PM $_{10}$ monitoring is undertaken at the locations listed in Table 6.

Table 3 DA 265-10-2004 Long Term Assessment Criteria for Deposited Dust

| Pollutant | Averaging Period | Maximum Increase in Deposited Dust Level ¹ | Maximum Total Deposited Dust Level ¹ |
|----------------|------------------|---|--|
| Deposited dust | Annual | 2 g/m ² /month | 4 g/m ² /month |

Note 1: Deposited dust is assessed as insoluble solids as defined by AS 3580.10.1-2003.

Table 4 DA 265-10-2004 Long Term Impact Assessment Criteria for Particulate Matter

| Pollutant | Average period | Criterion |
|---|----------------|-----------|
| Total suspended particulate (TSP) matter | Annual | 90 μg/m³ |
| Particulate matter <10 μm (PM ₁₀) | Annual | 30 μg/m³ |

Table 5 DA 265-10-2004 Short Term impact Assessment Criterion for Particulate Matter

| Pollutant | Averaging period | Criterion |
|---|------------------|----------------------|
| Particulate matter <10 µm (PM ₁₀) | 24 hour | 50 μg/m ³ |

Table 6 Air Quality Monitoring Locations

| Site ID | Location | Address | GPS Coordinates | | |
|---------------|---------------------|-------------------------|-----------------|--|--|
| DDG 1 (South) | South of the Karuah | 5760 Pacific Hwy, | 32°38'04"S | | |
| | Quarry | Karuah NSW 2324 | 151°59'58"E | | |
| DDG 2 (South- | South of the Karuah | 5770 Pacific Hwy, | 32°38'02"S | | |
| East) | Quarry | Karuah NSW 2324 | 152°00'09"E | | |
| DDG 3 (South- | South-West of the | DP 1024341, Karuah | 32°37'57"S | | |
| West) | Karuah Quarry | | 151°59'41"E | | |
| DDG 4 (East) | East of the Karuah | 21 Halloran Rd | 32° 37' 30.87"S | | |
| | Quarry | North Arm Cove NSW 2324 | 152°01'10.18"E | | |

All dust monitoring is undertaken in accordance with the *Approved Methods of Sampling and Analysis of Air Pollutants in NSW* (EPA, 2007).

2.1 DEPOSITED DUST MONITORING

Deposited dust results for April 2023 and the year to date (YTD) from the Consent anniversary (16 April) are shown in Table 7.

Table 7 Deposited dust monitoring results

| Date On | Date Off | DDG 1 | DDG 2 | DDG 3 | DDG 4 |
|-----------|-----------|-------|-------|-------|-------|
| 5/05/2022 | 3/06/2022 | 0.4 | 0.6 | 0.4 | 0.3 |
| 3/06/2022 | 5/07/2022 | 0.3 | 0.2 | 0.2 | 0.2 |
| 5/07/2022 | 3/08/2022 | 0.3 | 0.3 | 0.4 | 0.7 |
| 3/08/2022 | 2/09/2022 | 0.9 | 0.9 | 0.6 | 1.0 |
| 2/09/2022 | 4/10/2022 | 0.5 | 02 | 0.6 | 0.3 |
| 4/10/2022 | 3/11/2022 | 02 | 0.5 | 0.5 | 0.3 |
| 3/11/2022 | 5/12/2022 | 0.8 | 0.8 | 0.7 | 1.2 |
| 5/12/2022 | 5/01/2023 | 0.7 | 0.7 | 0.3 | 0.6 |
| 5/01/2023 | 3/02/2023 | 0.2 | 0.4 | 0.8 | 0.1 |
| 3/02/2023 | 6/03/2023 | 0.9 | 0.7 | 0.2 | 0.3 |
| 5/03/2023 | 5/04/2023 | 1.1 | 1.5 | 1.1 | 1.1 |
| 5/04/2023 | 4/05/2023 | 0.3 | 0.5 | 0.3 | 0.2 |
| YTD av | verage | 0.6 | 0.6 | 0.5 | 0.5 |

Monitoring results indicate that for the period from 5 April 2023 to 4 May 2023, the insoluble solid levels recorded at DDG 1 to DDG 4 monitoring locations were below the project criterion of $4 \text{ g/m}^2/\text{month}$.

2.2 HIGH VOLUME AIR SAMPLING

The TSP and PM₁₀ results for April 2023, the report average and a rolling annual average are shown in are shown in Table 8.

Table 8 High Volume Air Sampling (µg/m³) results

| Run Date | HVAS TSP (µg/m³) | HVAS PM10 (μg/m³) |
|---|---------------------|----------------------|
| 5/04/2023 | 14 | 11 |
| 11/04/2023 | 16 | 9 |
| 17/04/2023 | 14 | 8 |
| 23/04/2023 | 11 | 6 |
| 29/04/2023 | 21 | 10 |
| 24hr Average Criteria¹ | N/A | 50 |
| Annual Average Criteria ¹ | 90 | 30 |
| Progressive Annual Average ² | 19.2 | 11.6 |

Note: ¹ Criteria as specified in DA 265-10-2004.

All HVAS monitoring results, to the end of April 2023 were compliant with the long term and short term impact assessment criteria outlined in *Schedule 3 Condition 13* of the Consent (see Table 3, Table 4 and Table 5).

² The progressive annual average is from 01/01/2023 to 29/04/2023, this is not a measure of compliance.

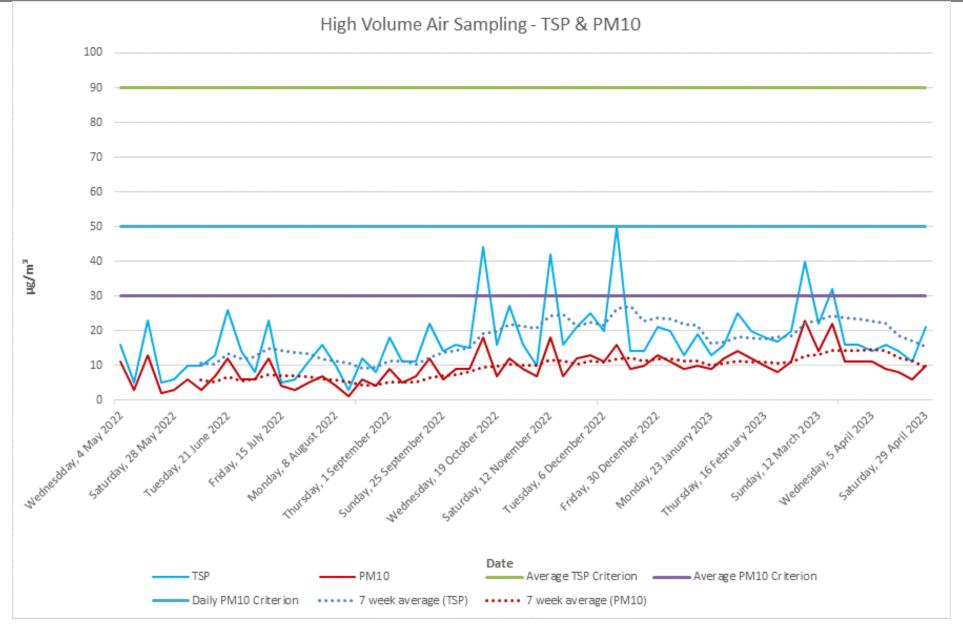


Figure 1 High Volume Air Sampling 2022/2023

3 BLAST MONITORING

Blasting must only be carried out between the hours of 9:00 AM and 3:00 PM Monday to Friday. No blasting is permitted on Saturday, Sundays or Public Holidays. Blasting outside of the hours specified by the EPL/Consent, can only take place with the written approval of relevant regulatory authorities.

KEQ conduct monitoring at the nearest residential location (EPL 11569 EPA identification no. 11) to ensure that airblast overpressure level and ground vibration peak particle velocity do not exceed the EPL and Consent criteria (see Table 9).

Table 9 EPL 11569 Condition M7.1 Blasting

| Parameter | Units of Measure | Frequency | Sampling Method |
|---|------------------------|------------|------------------------------------|
| Airblast Overpressure | Decibels (Linear Peak) | All blasts | Australian Standard AS 2187.2-2006 |
| Ground Vibration Peak Particle Velocity | Millimetres/second | All blasts | Australian Standard AS 2187.2-2006 |

There were no blasts conducted in April 2023.

Noise Monitoring

Noise generated by the Quarry operation must not exceed the criteria specified in Schedule 3, Condition 14 of the Consent (see Table 10) at the locations identified in Table 11.

Table 10 Noise impact assessment criteria

| Time Period | Noise Limit (dBA) LAeq(15minute) |
|------------------------------------|----------------------------------|
| Day | |
| 7:00am to 6:00pm Monday to Friday | 48 |
| 7:00am to 1:00pm Saturday | |
| Evening | |
| 6:00pm to 10:00pm Monday to Friday | 47 |
| A. All Od. T | |
| At All Other Times | 46 |
| | |

Table 11 Noise monitoring locations

| Noise Monitoring Location | Property Name | Distance from Karuah Quarry |
|---------------------------|---|---------------------------------------|
| NM1 | Lot 3 DP785172 5772 Pacific Hwy, Karuah | 317 metres South of the Karuah Quarry |
| NM2 | Lot 2 DP 785172 5760 Pacific Hwy, Karuah | 200 metres South of the Karuah Quarry |

4.1 ATTENDED MONITORING

Attended noise monitoring is required to be undertaken at the two nearest residences (NM1 and NM2) biannually.

The most recent attended noise monitoring was undertaken during November 2022, see monitoring results in Table 12.

Table 12 Attended noise monitoring results.

| Location | Date | Start time (Period) | Total noise levels, dB | | | | | | | Site noise level, dB EPL/PA Limits, dB | | Meteorological conditions ² | Exceedance, dB | Comments | | |
|----------|-------|------------------------|------------------------|------------------|------------------|------------------|-----------------|-------------------|------------------|--|------------------|---|--|----------|--|--|
| | | | L _{Amin} | L _{A90} | L _{Aeq} | L _{A10} | L _{A1} | L _{Amax} | L _{Ceq} | LFN mod. Factor ¹ | L _{Aeq} | L _{Aeq} | EPL limits apply (Y/N) | | | |
| А | 23/11 | 07:07 | 43 | 50 | 54 | 57 | 59 | 62 | 65 | Nil | IA | 48 | 0.9 m/s @ 301° A stability class Y | N/A | Karuah Quarry inaudible. Traffic on the Pacific Highway, insects and birds consistently audible. A dog barking occasionally audible. | |
| В | 23/11 | 07:50 | 50 | 57 | 64 | 67 | 72 | 78 | 73 | Nil | IA | 48 | 1.9 m/s @ 284° A stability class Y | N/A | Karuah Quarry inaudible. Traffic on the Pacific Highway, insects and birds consistently audible. | |

1. Modifying factor correction for LFN in accordance with Fact sheet C of the NPfl.

2. Meteorological data were taken as an average over 15 minutes from the Karuah Quarry on-site weather station (Refer to Section 5.1).
3. IA = inaudible.

4. N/A = not applicable.

The results of the attended monitoring (Table 12) show ambient noise levels include noise sources such as traffic from the nearby Pacific Highway and wildlife such as birds. The Quarry operation was inaudible at location NM1 and NM2.

4.2 UNATTENDED NOISE MONITORING

Unattended noise monitoring is required to be undertaken at the two nearest residences (NM1 and NM2) biannually.

The most recent unattended noise monitoring was undertaken during November, see monitoring results for NM1 and NM2 in Table 13.

Table 13 - Unattended noise monitoring results

| Location | Period | Measured noise levels, dB | | | | | |
|---------------------------------|---------|---------------------------|-------------------------|--|--|--|--|
| | | L _{A90} | L _{Aeq,period} | | | | |
| NM1 | Day | 45 | 52 | | | | |
| 23 November- 1 December 2022 | Evening | 46 | 55 | | | | |
| | Night | 43 | 51 | | | | |
| NM2 | Day | 56 | 64 | | | | |
| 23 November- 1 December 2022 | Evening | 49 | 63 | | | | |
| | Night | 39 | 62 | | | | |

The attended noise monitoring conducted during November 2022 identified that the Quarry was not audible at location NM1 or NM2. At the end of the monitoring period, the equipment located at NM2 was found to be vandalised and as such, the results from this location were not viable.

5 SURFACE WATER MONITORING

Condition *L2* of the EPL outlines the requirement to monitor surface water discharges from the Quarry via the licensed discharge point (LDP001), see Table 14.

Table 14 EPL 11569 - Pollutant concentration limits

| Pollutant | Units of Measure | Concentration Limit |
|------------------------|----------------------|---------------------|
| Oil and Grease | Visible | 5 &/or non-visible |
| рН | pH units | 6.5 – 8.5 |
| Total suspended solids | Milligrams per litre | 50 |

There were no controlled discharges from LDP001 during the month of April 2023.

6 WEATHER MONITORING

Karuah Quarry has a permanent meteorological station to monitor various weather parameters. Figure 2 shows the recorded results for the local weather during April 2023. Weather data is significant from an environmental perspective, especially when regarding the total rainfall in the area as this effects multiple variables particularly erosion and sediment control as well as water quality management.

A wind rose is a graphic tool used to depict the average direction and speed of the wind over a recorded period. Figure 3 shows the wind rose generated from data gathered during April 2023.

Monthly Weather Summary



Karuah Quarry Site: April 2023 Month:

| | | Temperatu | re @ 2m | | Temperati | ure @ 10m | | Winds | | | Solar Radiation | | Dain-2 |
|-------|-------|------------------|---------|------------------|-----------------------------------|-----------|------------------|---------------------------------|------|----------|------------------|------------------|-------------------|
| Date | Day | Max ¹ | Min² | Ave ¹ | Max ¹ Min ² | | Ave ¹ | Max Gust ¹ Ave Speed | | Dir Ave¹ | Max ¹ | Ave ¹ | Rain ² |
| | | °C | °C | " C | °C | •с | °C | km/h | km/h | deg | W/m² | W/m² | mm |
| 1 | Sat | 26.1 | 10.1 | 17.4 | 23.1 | 11.4 | 17.0 | 31.9 | 4.9 | 220 | 813.2 | 183.8 | |
| 2 | Sun | 25.0 | 12.0 | 17.8 | 22.3 | 12.6 | 17.5 | 23.7 | 3.2 | 201 | 934.2 | 137.6 | 40.0 |
| 3 | Mon | 23.5 | 14.5 | 18.1 | 22.2 | 14.5 | 17.9 | 16.6 | 2.6 | 173 | 715.8 | 113.5 | 5.6 |
| 4 | Tue | 23.7 | 15.9 | 18.2 | 22.2 | 15.8 | 18.0 | 30.8 | 4.8 | 199 | 1029.2 | 120.5 | 7.2 |
| 5 | Wed | 24.5 | 15.8 | 18.0 | 23.1 | 16.0 | 18.0 | 28.4 | 3.6 | 218 | 852.4 | 122.2 | 13.0 |
| 6 | Thu | 23.7 | 13.9 | 16.7 | 22.4 | 14.4 | 17.2 | 21.3 | 2.5 | 170 | 765.8 | 104.9 | 1.4 |
| 7 | Fri | 23.2 | 13.9 | 17.6 | 22.7 | 14.6 | 18.5 | 37.9 | 4.1 | 234 | 668.3 | 97.0 | 8.8 |
| 8 | Sat | 24.6 | 13.3 | 19.4 | 23.4 | 14.8 | 19.5 | 59.2 | 11.6 | 287 | 744.9 | 181.5 | 8.0 |
| 9 | Sun | 22.8 | 14.9 | 16.1 | 21.8 | 15.5 | 16.5 | 52.1 | 7.6 | 278 | 800.7 | 181.6 | |
| 10 | Mon | 21.4 | 8.6 | 13.7 | 20.0 | 11.3 | 14.4 | 26.0 | 4.6 | 248 | 834.1 | 165.0 | |
| 11 | Tue | 22.6 | 6.3 | 15.6 | 21.0 | 7.6 | 15.5 | 31.9 | 3.8 | 242 | 658.3 | 172.4 | |
| 12 | Wed | 23.9 | 9.5 | 15.8 | 22.3 | 10.0 | 15.9 | 30.8 | 4.2 | 238 | 925.0 | 109.6 | |
| 13 | Thu | 22.9 | 12.5 | 16.9 | 21.2 | 12.8 | 16.9 | 39.0 | 3.6 | 197 | 897.4 | 105.8 | 5.6 |
| 14 | Fri | 23.6 | 15.1 | 15.8 | 21.7 | 15.4 | 15.9 | 27.2 | 3.4 | 217 | 920.7 | 146.4 | 20.6 |
| 15 | Sat | 25.6 | 10.6 | 19.5 | 24.2 | 11.3 | 19.7 | 18.9 | 3.8 | 193 | 633.3 | 153.4 | 3.8 |
| 16 | Sun | 23.5 | 16.0 | 17.6 | 23.6 | 16.2 | 18.5 | 21.3 | 3.1 | 222 | 475.8 | 66.5 | 0.2 |
| 17 | Mon | 23.6 | 8.9 | 15.1 | 21.5 | 10.0 | 15.3 | 20.1 | 3.2 | 225 | 890.7 | 97.8 | |
| 18 | Tue | 24.0 | 10.1 | 15.6 | 21.7 | 11.1 | 15.8 | 23.7 | 3.1 | 172 | 835.8 | 153.0 | |
| 19 | Wed | 24.9 | 11.0 | 17.4 | 24.1 | 11.5 | 17.6 | 18.9 | 3.0 | 188 | 773.3 | 134.9 | 0.2 |
| 20 | Thu | 18.8 | 12.9 | 16.7 | 19.6 | 13.5 | 17.2 | 35.5 | 4.9 | 180 | 192.5 | 33.9 | |
| 21 | Fri | 23.4 | 13.4 | 16.6 | 21.4 | 13.6 | 16.6 | 26.0 | 3.8 | 213 | 797.4 | 122.8 | 28.6 |
| 22 | Sat | 24.2 | 12.0 | 16.2 | 21.8 | 12.6 | 16.3 | 24.9 | 2.6 | 205 | 898.3 | 120.5 | 0.4 |
| 23 | Sun | 24.1 | 11.4 | 17.0 | 22.3 | 11.9 | 17.3 | 28.4 | 4.0 | 204 | 816.6 | 122.2 | 1.4 |
| 24 | Mon | 24.1 | 12.5 | 17.4 | 22.0 | 13.2 | 17.4 | 28.4 | 4.2 | 207 | 859.9 | 132.3 | 0.2 |
| 25 | Tue | 24.2 | 12.1 | 15.0 | 22.6 | 12.3 | 15.3 | 17.8 | 2.3 | 199 | 769.9 | 107.7 | |
| 26 | Wed | 25.0 | 10.0 | 16.4 | 23.0 | 10.7 | 16.8 | 21.3 | 2.6 | 171 | 847.4 | 132.8 | |
| 27 | Thu | 25.2 | 11.7 | 17.8 | 23.7 | 12.4 | 18.3 | 21.3 | 3.4 | 132 | 694.1 | 148.1 | |
| 28 | Fri | 27.4 | 12.5 | 19.0 | 26.1 | 13.4 | 19.5 | 18.9 | 3.2 | 159 | 574.9 | 147.2 | |
| 29 | Sat | 25.3 | 13.0 | 18.0 | 23.4 | 14.1 | 18.0 | 18.9 | 3.6 | 224 | 689.2 | 101.9 | |
| 30 | Sun | 22.1 | 13.2 | 15.1 | 20.8 | 13.8 | 15.8 | 28.4 | 4.3 | 270 | 749.9 | 135.1 | 8.4 |
| Aveor | Total | 23.9 | 12.3 | 16.9 | 22.4 | 12.9 | 17.1 | 27.7 | 4.0 | 209.5 | 768.6 | 128.4 | 153.4 |
| Hig | | 27.4 | 16.0 | 19.5 | 26.1 | 16.2 | 19.7 | 59.2 | 11.6 | | 1029.2 | 183.8 | 40.0 |
| Low | | 18.8 | 6.3 | 13.7 | 19.6 | 7.6 | 14.4 | 16.6 | 2.3 | | 192.5 | 33.9 | |

2. Values are for the 24 hours to 9am.

Figure 2 Weather Summary April 2023

Wind Rose Report for: Karuah East - 15 Min Data

VWDIR Vector Wind Dir and VWSP Vector Wind Spd in km/h Period: 2023-04-01 00:00 to 2023-04-30 00:00 Direction the Wind is Blowing To

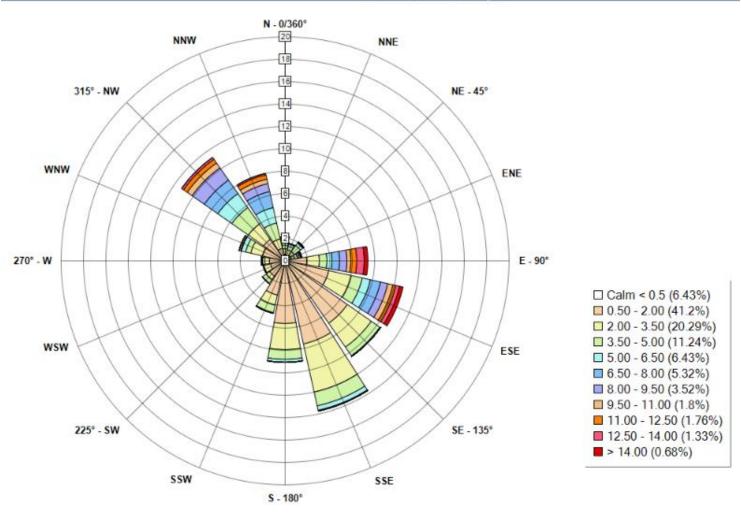


Figure 3 Wind Rose April 2023

7 REPORTING

7.1 INCIDENT

There were nil environmental incidents during April 2023 to report.


7.2 Non-Compliance

There were nil non-compliance events during April 2023 to report.

7.3 COMPLAINTS

There were nil complaints received during April 2023.

Appendix 1 – Monitoring Location

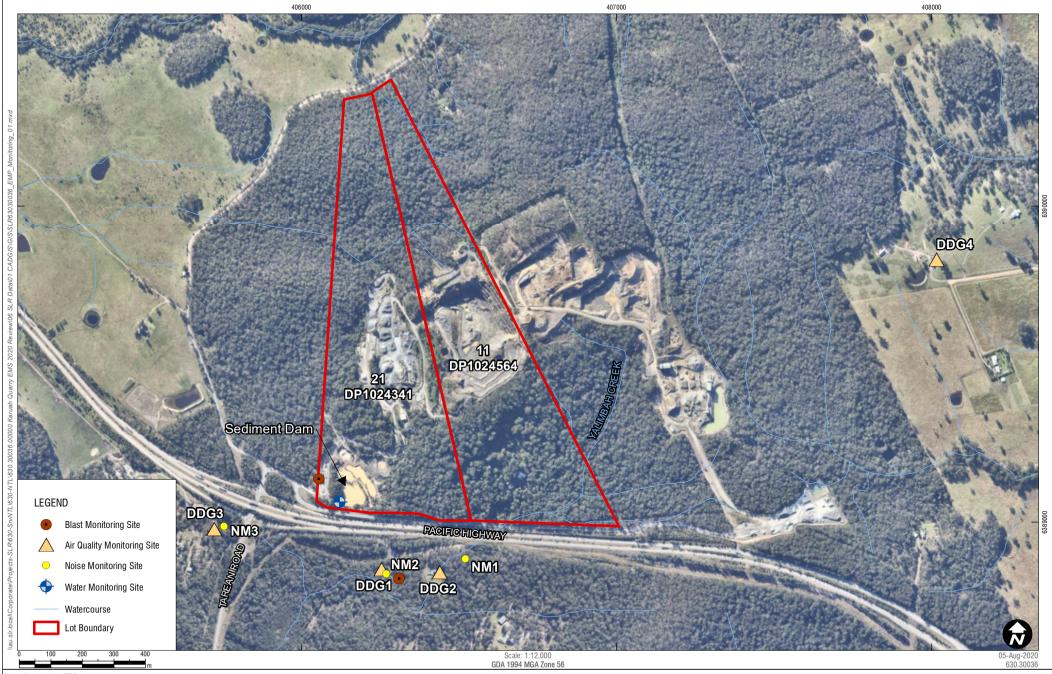

Source: Nearmap (June 2020)



Karuah Hard Rock Quarry Environmental Monitoring Locations